



April 24, 2019

HISD 2018 Bond Package 1  
West Central Elementary  
High School  
Hereford, Texas  
CHA# 1904

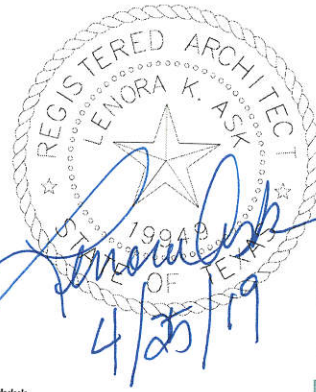

**ChapmanHarvey**  
ARCHITECTS, INC.

Bids Due \*\*\* May 1, 2019 2:00 pm \*\*\*

Bid Documents dated: 4/15/19

### **Addendum Three**

The following shall be incorporated in and become a part of the original Drawings and Specifications of the above identified project. Please acknowledge receipt of this Addendum by noting it on your proposal.

Attached: Revised Detail 4/A203W and 5/A203W

1. Portions of existing ceilings and flooring are to be removed and reinstalled to accommodate existing joist modifications required in addendum 1.
2. Typical all new parapet framing at West Central – 3 5/8” studs at 16” OC to be provided as infill between structural steel framing shown on structural detailing.
3. General clarification – all structural steel shown on the structural plans to be provided as detailed whether shown on architectural details or not. Structural plans to supersede architectural in terms of framing materials and configuration. Revised architectural details will be issued as needed
4. Replace detail 5/A103W with revised detail attached.
5. Replace detail 4/A103W with revised detail attached.
6. Masonry column wraps to extend to elevation 108'-10”.


**End of Addendum Three**

612 Broadway

Lubbock, Texas 79401

806.749.1153 fax 749.1866

architect@chapmanharvey.com

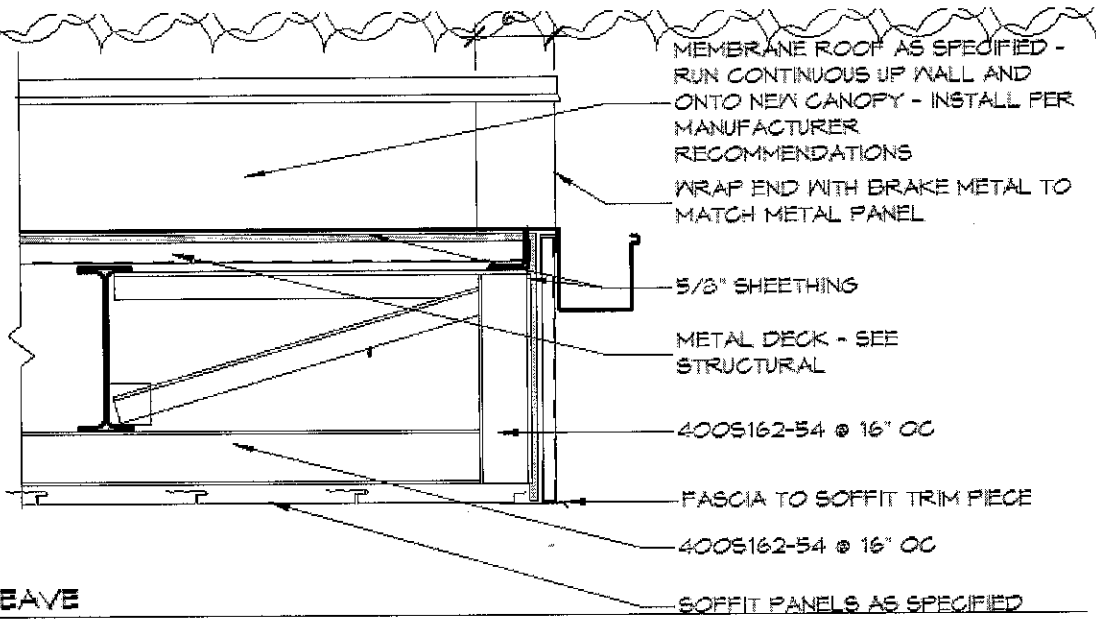

4 CANOPY EAVE  
 1" ■ 1'-0"

1/8" = 1'-0"

A

3 5/8" METAL STUD INFILL BETWEEN STRUCTURAL SUPPORTS - SEE FRAMING DETAILS ON STRUCTURAL SHEETS

5/8" SHEATHING

400S162-54 @ 16" OC

PRE-FINISHED METAL SOFFIT AS SPECIFIED

NEW DOWNSPOUT

SEAL METAL COPING AROUND COLUMN

TPO TERM-BAR WITH COUNTER FLASHING BEYOND

TPO FLASHING UP EXISTING WALL BEYOND

LINE OF COLUMN

STEEL COLUMN BEYOND - PRIME AND PAINT

PREFINISHED METAL COPING

MEMBRANE ROOF AS SPECIFIED - NEW GUTTER RUN CONTINUOUS UP WALL AND ONTO NEW CANOPY - INSTALL PER MANUFACTURER RECOMMENDATIONS

110' - 0"

5/8" SHEATHING

METAL DECK - SEE STRUCTURAL

STEEL FRAMING - SEE STRUCTURAL

108' - 10 1/4"

108' - 7 1/2"

FASCIA TO SOFFIT TRIM PIECE

SOFFIT PANELS AS SPECIFIED

400S162-54 @ 16" OC

1' - 8"

1' - 8"

B

LOW CANOPY/HIGH CANOPY

1" = 1'-0"

UNLESS OTHERWISE SPECIFIED