

Addendum

Addendum No.: 2
Date: 10/06/17

Project: **Midway**
Project No.: 17-0417.001

From: Dekker/Perich/Sabatini
500 South Taylor St., Suite 750, Lobby Box #254
Amarillo, TX 79101

To: All Prospective Bidders and Plan Holders



DEKKER
PERICH
SABATINI

ARCHITECTURE
DESIGN
INSPIRATION

This Addendum forms a part of the Bid Documents and modifies the Bid Documents issued by Dekker/Perich/Sabatini (D/P/S) and dated 10/06/2017. Acknowledge receipt of this Addendum on the Bid Form. Failure to do so may subject the Bidder to disqualification. All other provisions of the Bid Documents shall remain unchanged. This Addendum contains a total of 3 – 8½”x11” pages.

BIDDING REQUIREMENTS:

1. Time and Location
 - a. **No changes.**

GENERAL:

1. Clarification: CISD is installing the millwork that they are providing and will install the millwork while the project is in construction. The general contractor will coordinate with CISD's crew to install the millwork that they are providing at an appropriate time in the construction sequence.
2. Clarification: The kitchen equipment for Serving 118 is provided by CISD. CISD will store the kitchen equipment until the appropriate time for the equipment to be installed and will have it delivered to the job site. The contractor shall install the kitchen equipment provided by CISD.
3. Refer to the attached Addendum # 2 from Brown Consulting Engineers

All other provisions of the Contract Documents shall remain unchanged. This addendum is hereby made a part of the Contract Documents to the same extent as those provisions contained in the original documents and all itemized listings thereof.

End of Addendum

BROWN CONSULTING ENGINEERS, INC.

3505 OLSEN • SUITE 110
AMARILLO, TEXAS 79109

(806) 354-0141
FAX: (806) 354-0142

October 6, 2017

BCE, Inc. Project #21737

Memo to: Wendy Weatherly, Dekker Perich Sabatini

From: James D. Hartman, P.E.

Subject: Canyon ISD – Midway
Addendum #2

Please forward the following addendum to the contractor for inclusion in the project.


ELECTRICAL

Item 1: Sheet E202: Revise keyed note 25 as indicated on attached Sketch SKE202a.

End of Addendum #2



October 6, 2017
Texas Registered Engineering Firm
F-683

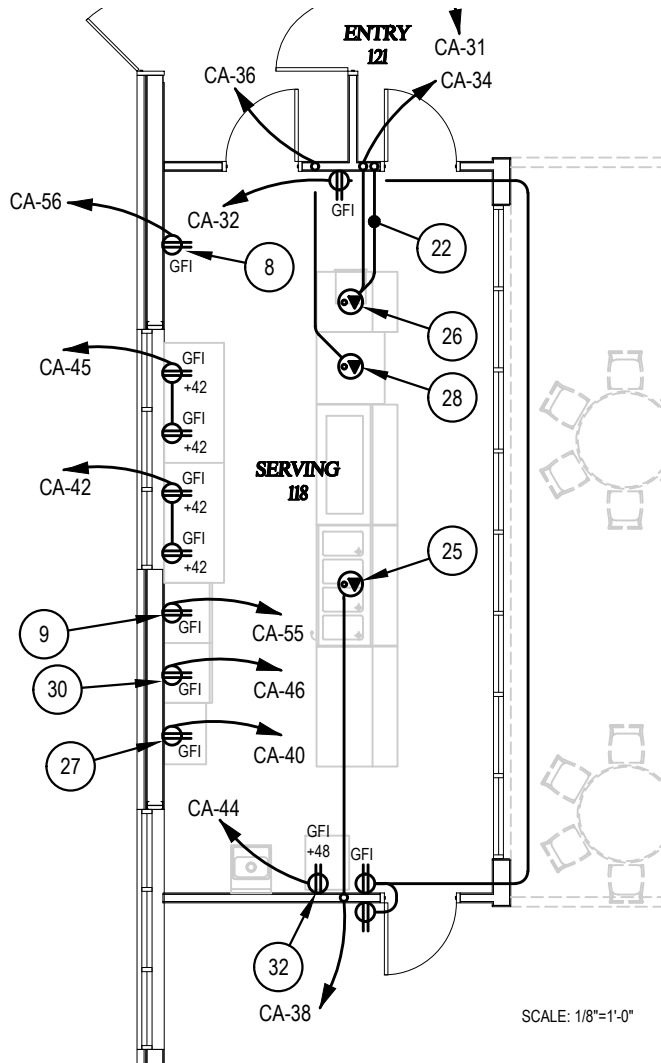

KEYED NOTES:

- 25 INSTALL RECEPTACLE IN A HUBBELL SA6688 ABOVE-FLOOR SERVICE FITTING WITH SS23 BLANK PLATE ON BACK SIDE AND SS703 SINGLE RECEPTACLE OPENING PLATE FOR RECEPTACLE ON FRONT. INSTALL A NEMA 5-50 RECEPTACLE IN FRONT PLATE. RUN WIRE AND CONDUIT FROM RECEPTACLE BELOW SLAB TO WALL, THEN UP IN WALL TO ACCESSIBLE CEILING SPACE. HOMERUN 2-8, 1-10G, 1\"C. CORE DRILL FIRST FLOOR AS REQUIRED FOR INSTALLATION. VERIFY EXACT LOCATION WITH OWNER PRIOR TO INSTALLATION.

SCALE: 1/8"=1'-0"



**BROWN
CONSULTING
ENGINEERS INC.**

3505 Olsen • Suite 110 • Amarillo, Texas 79109
Texas Registered Engineering Firm F-683



October 6, 2017

Canyon ISD - Midway
SHEET SKE202a
DATE 10-06-17
Addendum #2